




Prelude 35 XL²

Exposed 35mm grid system.


Key Features


- Peakform  patented design for strength / longer spans, stability and easier to cut
- Superlock clip: secure Main Runner connection for better alignment and easier to disconnect
- Double bent tee bar hanger for stability / improved loadbearing performance in corridors
- Rotary stitched: strength and extra stability
- Ideal for corridors, industrial manufacturing and circulation areas

Physical Data


- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: Global White, galvanised

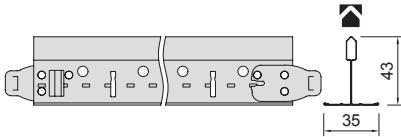


Universal Peakform Main Runner & Superlock Clip (Bulb-to-Bulb Connection)



Item No.	Dimensions (mm)				Standard Colours	
	Length	Width	Height	Slot Centres	Global White	Galvanised
 24 40 42	3600	35	43	100	•	•

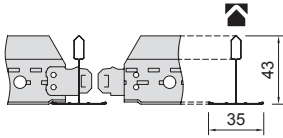
Prelude 35 XL2 – Peakform Cross Tees (Stab System, Override)



 24 36 42	1500	35	43	-	•	•
 24 30 42	1200	35	43	600	•	•
 24 20 42	600	35	43	-	•	•

Accessories



Item No.	Description	Dimensions (mm)	
		Length	Height
 A WDN 23 G	Double bent tee bar hanger	57	36

Sustainability



25



A+



EN 13964
E1

Fire Reaction



Euroclass A1
EN 13501-1

Performances & Features



If you would like to order a sample or have any queries about this product please contact our Technical Sales Team on **0800 371 849** or email enquiries@zentia.com

TDS 122.1.04.23