




Fission FT

The non-directional Fine Fissured surface provides a solution for providing Class C sound absorption.

Key Features

- Good sound absorption: 0.60(H) α_w
- Ideal for storage facilities, corridor and warehouses

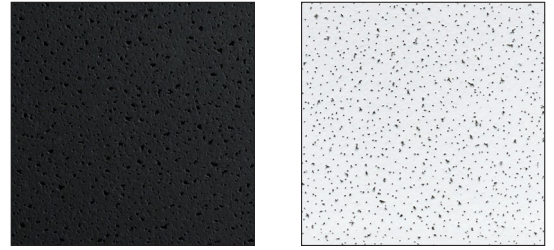

Edge Detail	Board	Tegular	MicroLook
Thickness (mm)	15	15	15
Modules (mm)	600 x 600 9121M 1200 x 600 9120M	600 x 600 9122M	600 x 600 9202M
Suspension Systems	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 15 TL / XL ² Interlude HRC XL ²
Colour	Global White / Black (available for 9121M only)		

Sustainability



51%



A+



EN 13964 / E1

Acoustics



EN ISO 354
& EN ISO 11654



EN ISO 21040-9
& EN ISO 717-1

	α_w	D _{nfw}	Class	NRC	Hz α_p					
					125	250	500	1000	2000	4000
Board, Tegular, MicroLook	0.60(H)	34 dB	C	0.65	0.40	0.40	0.55	0.80	0.85	0.85
Board (Black)	0.60(H)	34 dB	C	0.65	0.35	0.40	0.55	0.75	0.80	0.85

Fire Reaction



Euroclass A2-s1, d0
EN 13501-1

Performances & Features



85%
White



95% RH



3.4 Kg/m²



30 Year
System
Guarantee

BIM
READY

Custom Options



Dimensions

If you would like to order a sample or have any queries about this product please contact our Technical Sales Team on **0800 371 849** or email enquiries@zentia.com

TDS 076.2.12.22