

Baffles

Installation Guide




01 Baffles


Indoor Application Installation

Grouping option – installed on Gridline 24 Main Runner

SECTION A

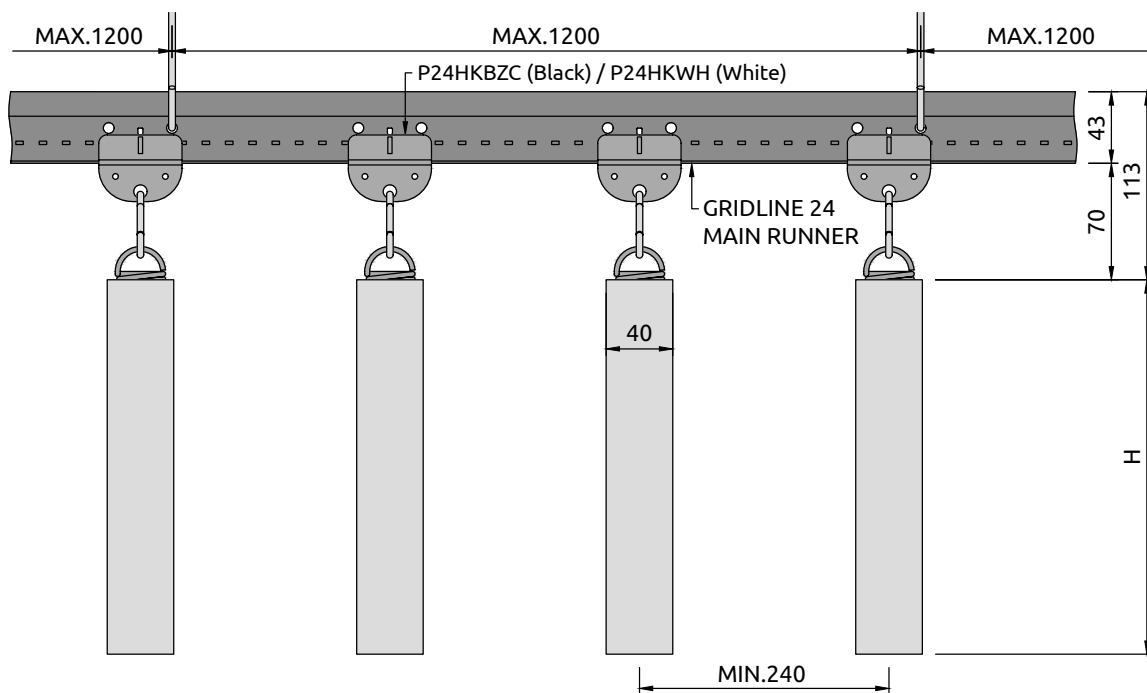


SECTION B

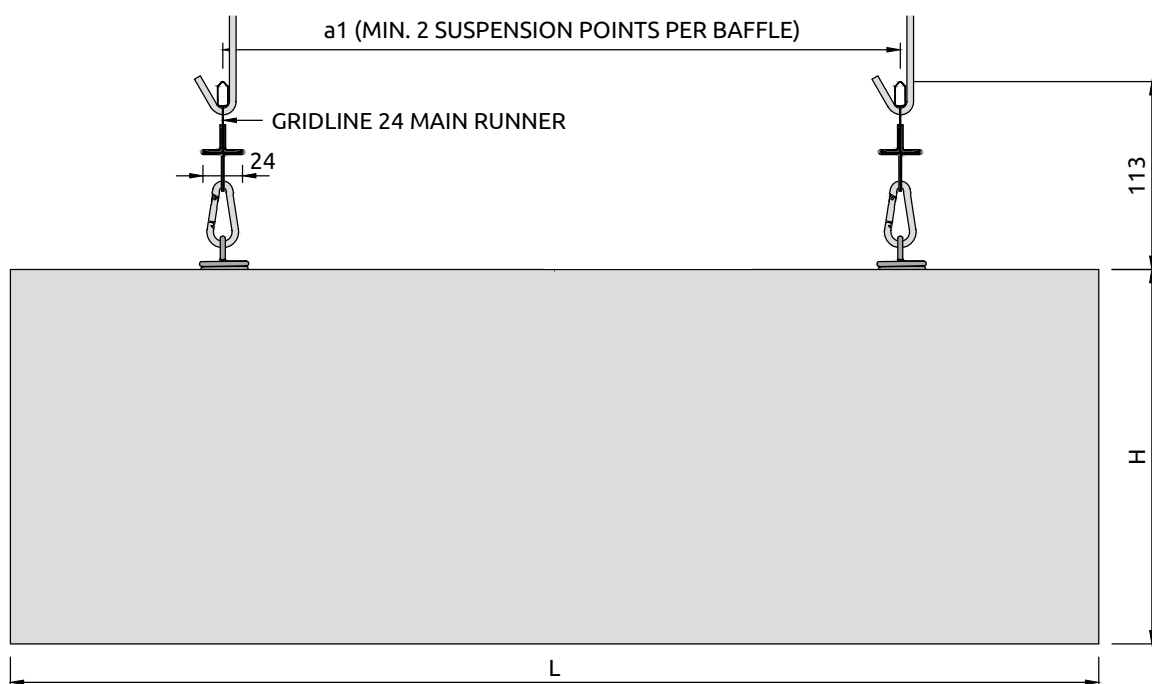

02 Grid Layout

TYPICAL GRID LAYOUT

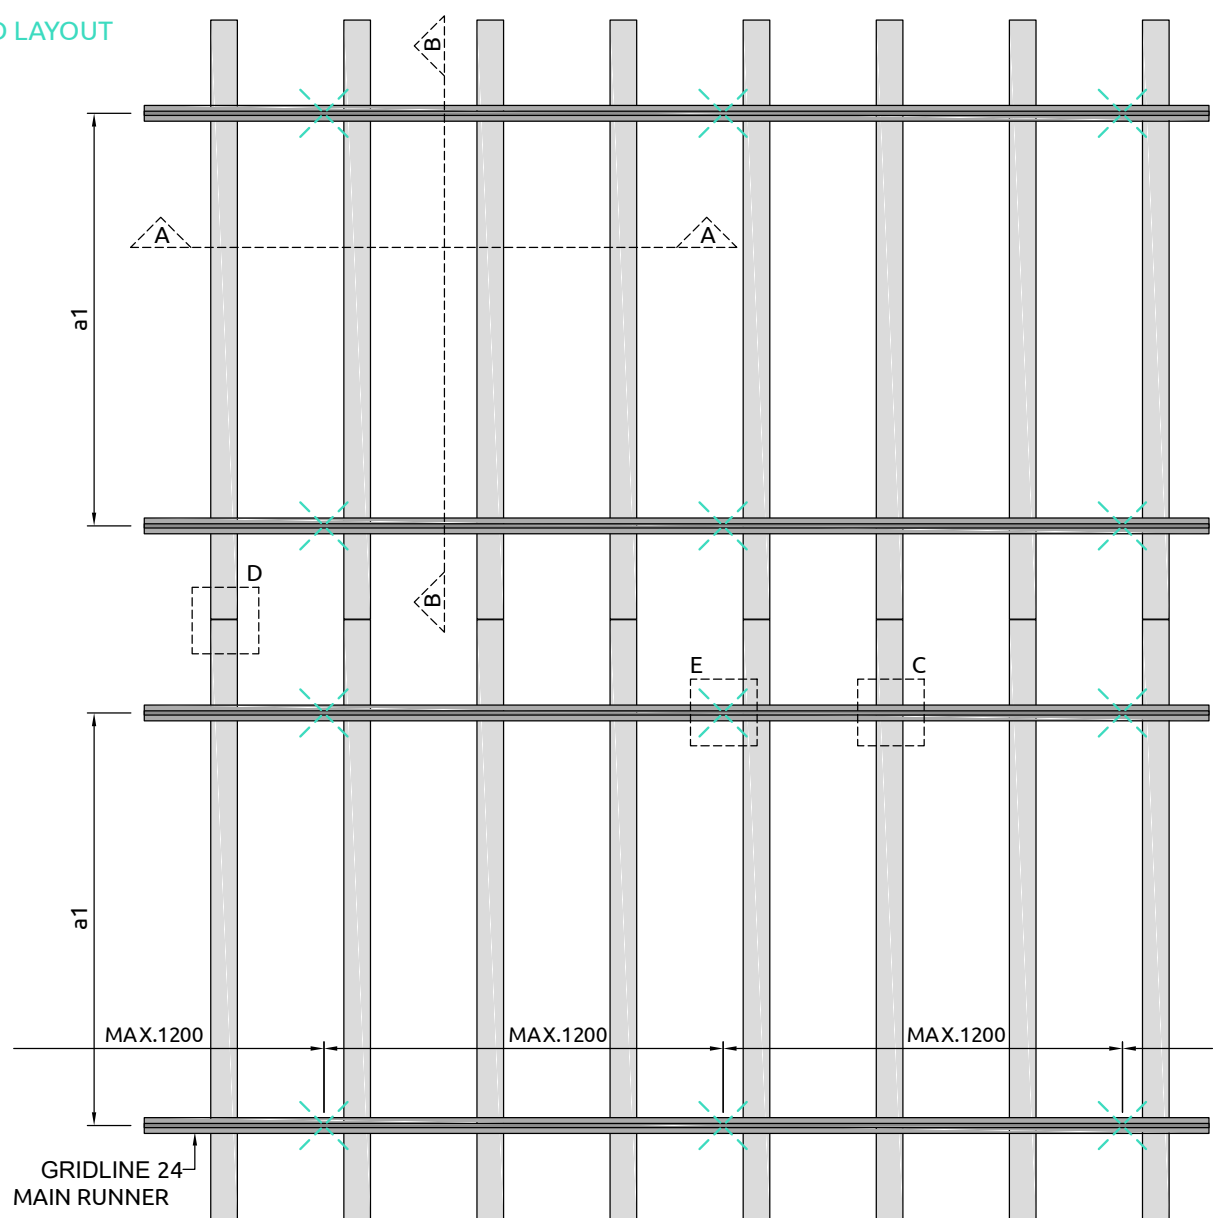

- a1** Max. distance between Gridline 24 Main Runner Centres = 1200 mm
 - Baffle up to 0.75m² with 2 suspension points
 - Baffle up to 1.0m² with 3 suspension points
 - Baffle up to 1.44m² with 4 suspension points
- L** Baffle length = Max. 2400mm
- H** Baffle height = Min. 100 / Max. 600mm
- W** Baffle width = 40mm


Typical Baffle Weights	
Baffle Height (H - mm)	
300	1.4 kg/m
400	1.9 kg/m
500	2.4 kg/m
600	2.9 kg/m

03 Hanger Kit


Hanger Kit Installation

DETAIL C

1

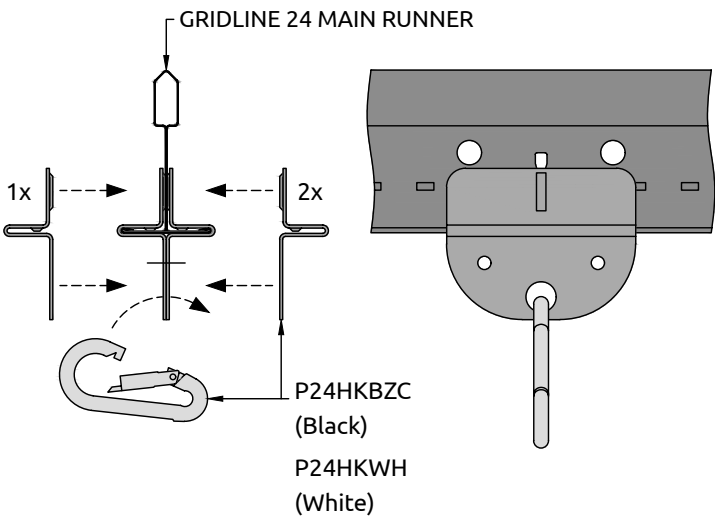





2

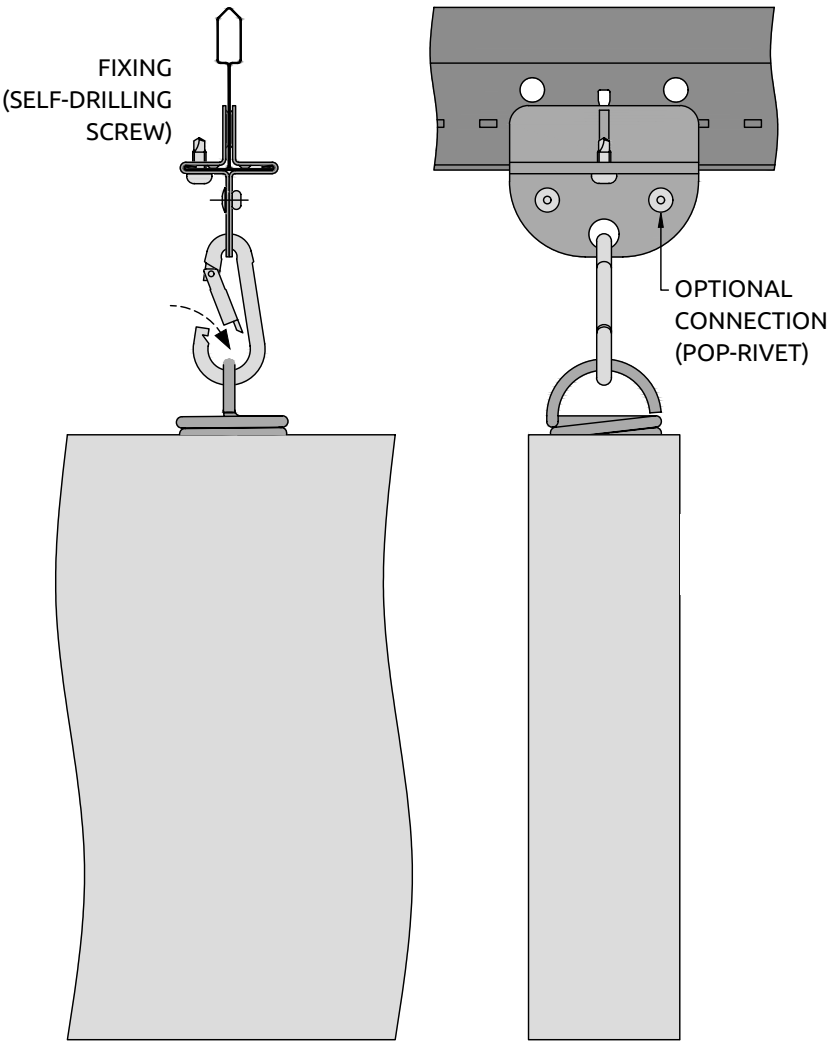

03 Connector Kit

Connector Kit Installation




DETAIL D

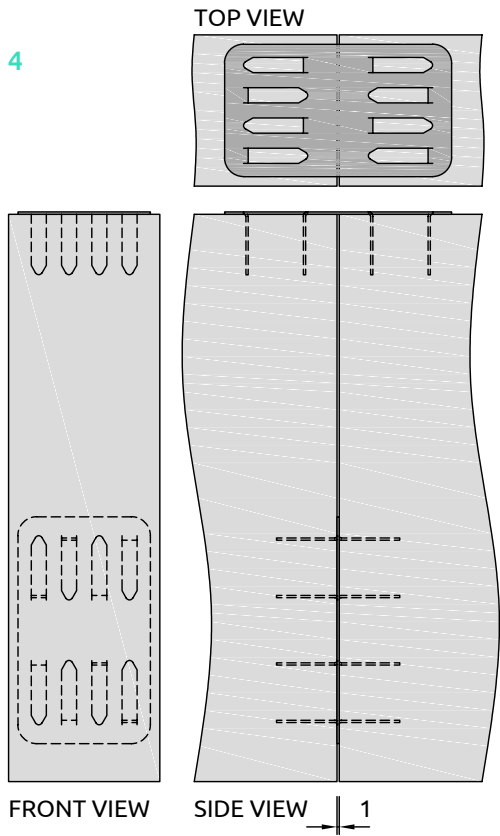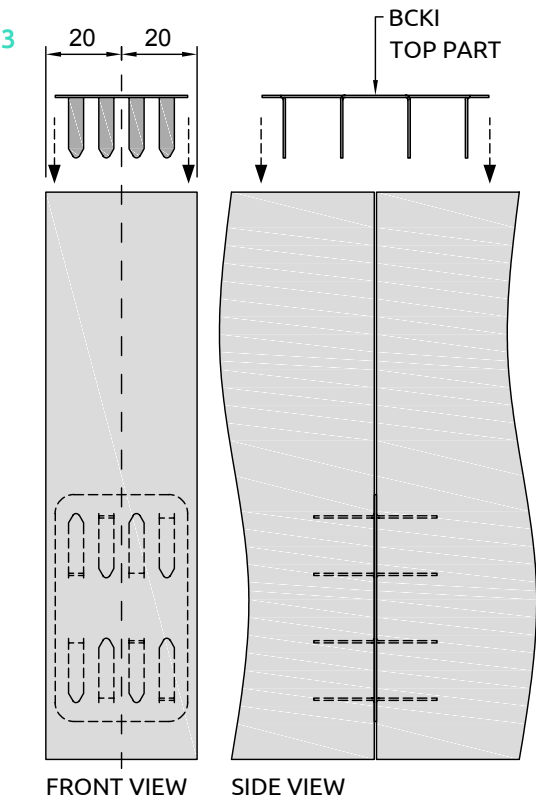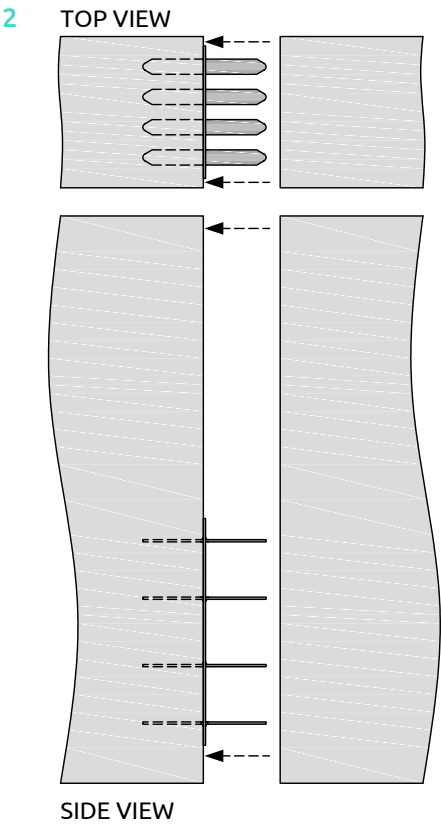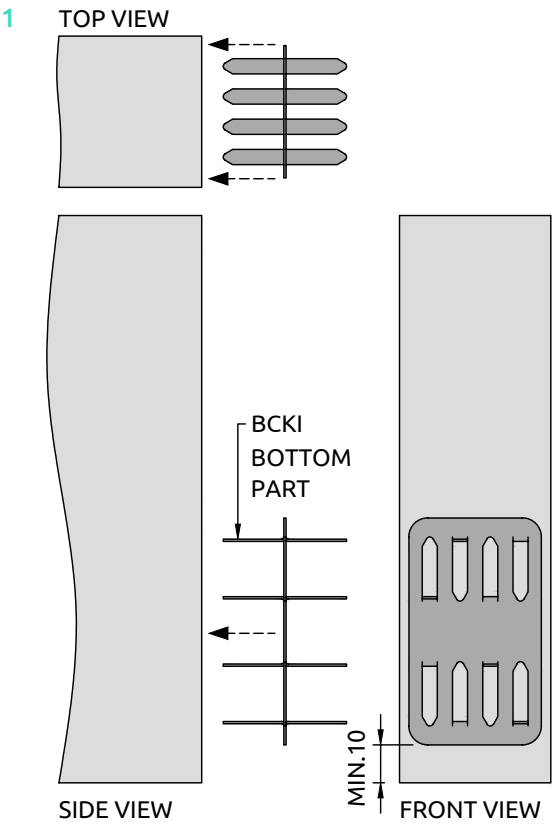

04 Suspension Points

Factory Fitted Spiral Anchors.


SUSPENSION POINTS

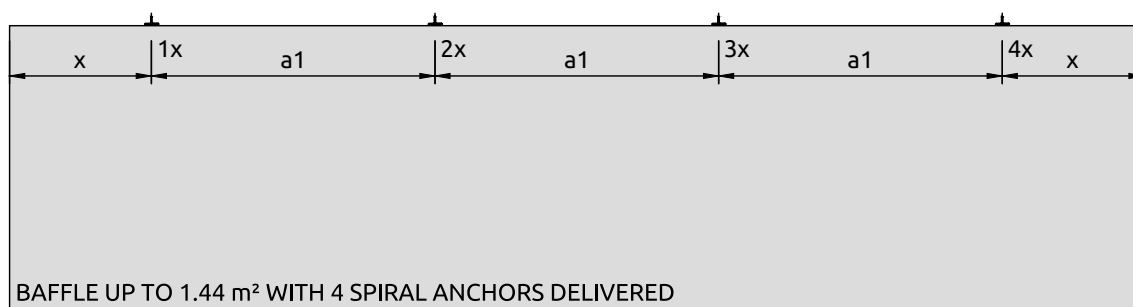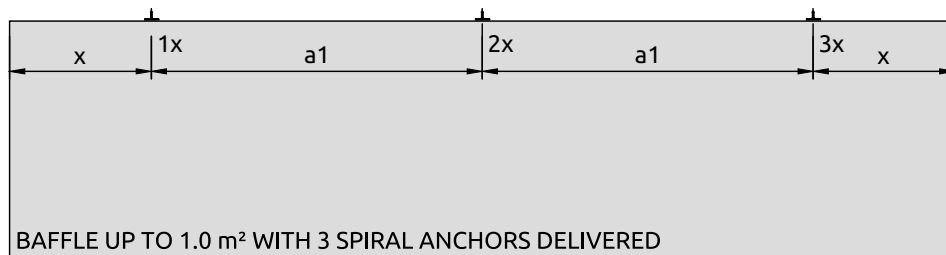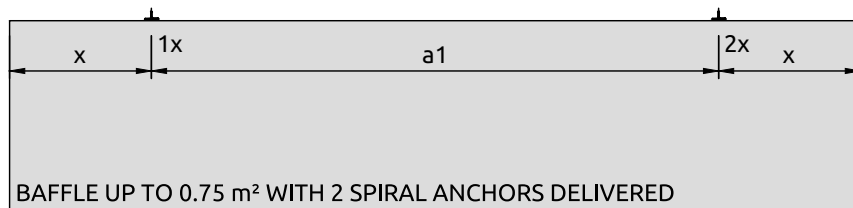

05 Suspension Methods


Main Runner Suspension Methods

DETAIL E

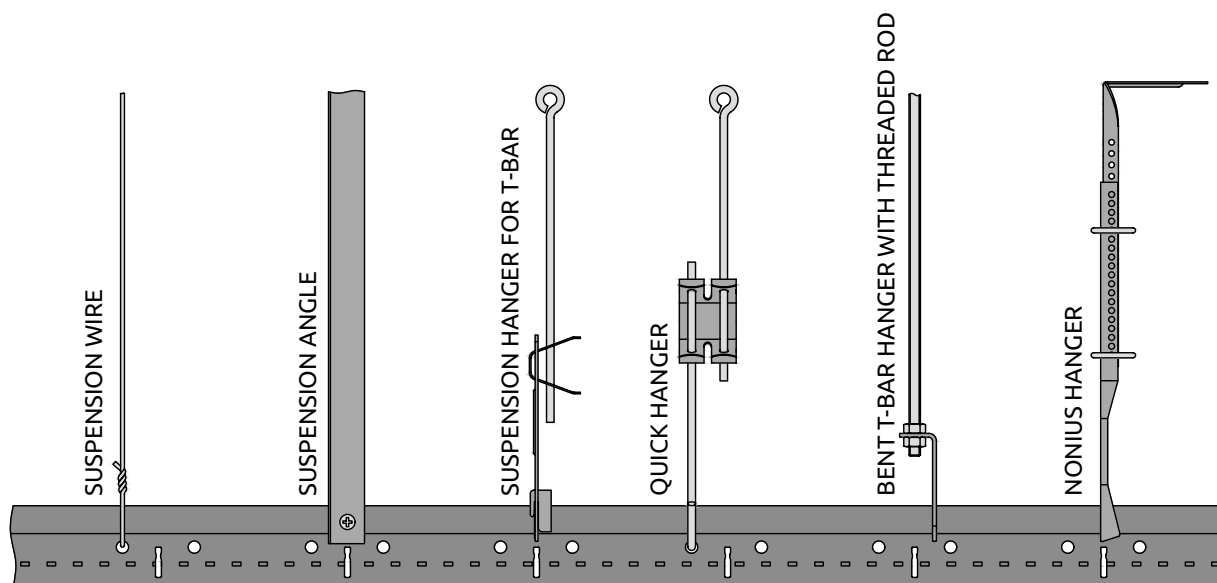

Alignment Option Parallel to Baffle Direction

DETAIL F

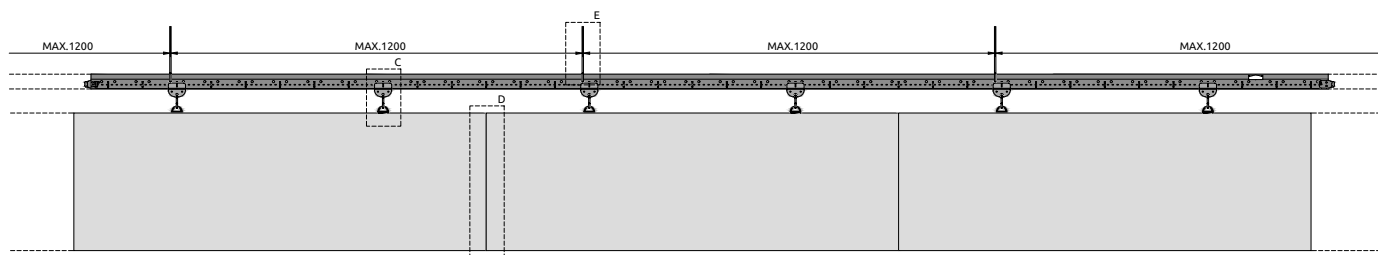

INS 139.1.12.24