



Gridline 24 NT+

Exposed 24mm grid system. Gridline NT+ Main Runners
& Gridline 24 NT+ Cross Tees

Key Features

- Peak form Main Runner design for strength, stability and easier to cut
- SureLock clip secures Main Runner connection for better alignment and easier to disconnect
- Rotary stitched for strength and extra stability
- Stainless steel Main Runner clips with a positive audible click


Physical Data

- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: available in white

Application Areas


- Classrooms / Meeting rooms / Individual offices

Gridline 24 NT+ Main Runner and SureLock Clip (Bulb-to-Bulb Connection)

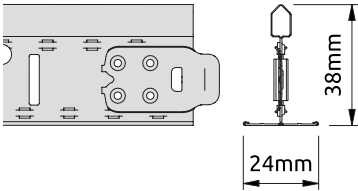


Item No.	Dimensions (mm)			Content/Carton		Weight/Carton	Cartons/Pallet
	Length	Width	Height	pcs	lm	Kg	
BPGMR243600NT	3600	24	38	20	72	21.00	30

Gridline 24 NT+ Cross Tees (Hook System, Butt Cut)

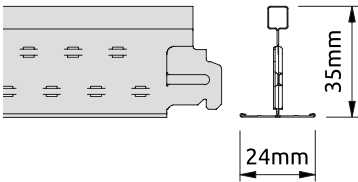

Item No.	Dimensions (mm)			Content/Carton		Weight/Carton	Cartons/Pallet
	Length	Width	Height	pcs	lm	Kg	
BPGXTB241200NT	1200	24	35	60	72	15.70	72

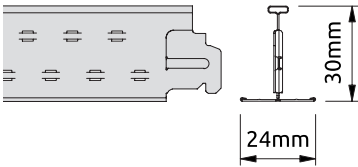

BPGXTB24600NT	600	24	30	60	36	8.40	144
---------------	-----	----	----	----	----	------	-----

Sustainability



25



A+



EN 13964
E1

Fire Reaction




Euroclass A1
EN 13501-1

Performances & Features




Section Drawings


Gridline 24 NT+ Main Runner

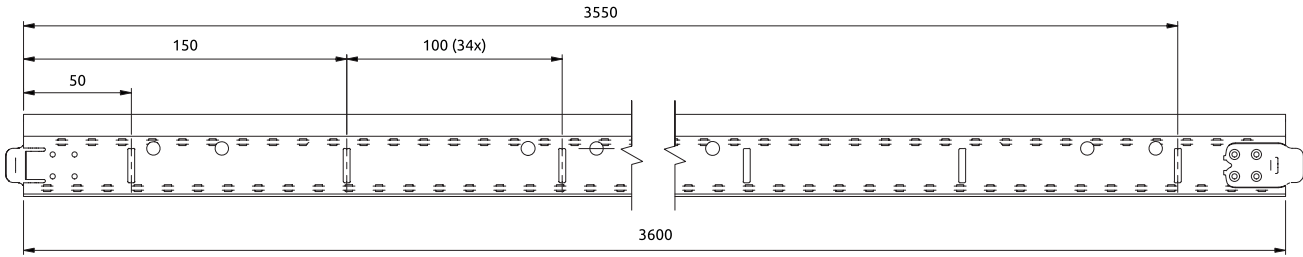

Gridline 24 NT+ Cross Tees

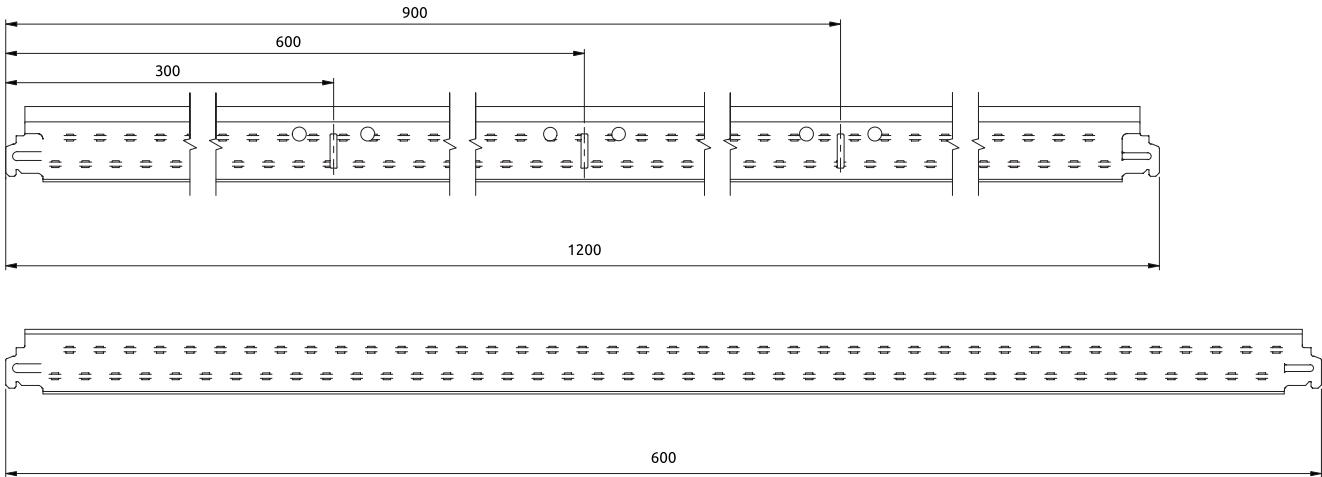

Grid Load Capacities

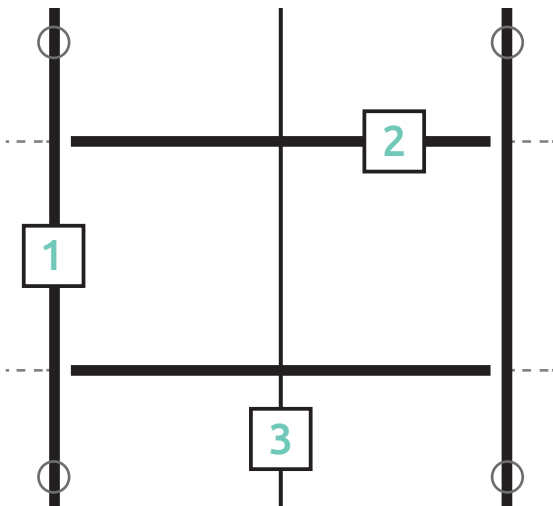

General Applications

Gridline 24 NT+

- Maximum Load = 9.5 kg/m²
- Suspension points at 1200mm centres, deflection L/500 (4mm max.) according to EN 13964 : 2014 standard

- 1 BPGMR243600NT
- 2 BPGXTB241200NT
- 3 BPGXTB24600NT

All measurements in millimetres. All sizes are nominal.

If you would like to order a sample or have any queries about this product please contact our Technical Sales Team on **0800 371 849** or email enquiries@zentia.com

TDS 179.1.01.24